

Flexitank Standart

Depósito de líquidos para contenedores
Liquid container constructed for containers



ISO 9001:2008
ISO 14001
OHSAS 18001

Progeco Bilbao, S.A.
Registro Mercantil de Vizcaya,
Folio 222, Tomo 103
CIF: A48172258

ZAD-3. Ampliación Puerto de Bilbao
Barrio El Kalero, s/n
P.O. Box 42.
48980 Santurtzi, Bizkaia (Spain)

T. +34 94 493 50 86
F. +34 94 493 74 96
progeco@progecobilbao.com
www.progecobilbao.com

Flexitank Standart

Depósito de líquidos para contenedores
Liquid container constructed for containers




Contenedor de líquidos fabricado con múltiples capas de polietileno y cubierta externa de polipropileno, con capacidad de carga entre 14000 y 24000 litros.

Liquid container constructed of multiple layers of polyethylene with an outer covering of woven polypropylene with volume from 14000 up to 24000 liters.

Flexitank Standart

Depósito de líquidos para contenedores
Liquid container constructed for containers

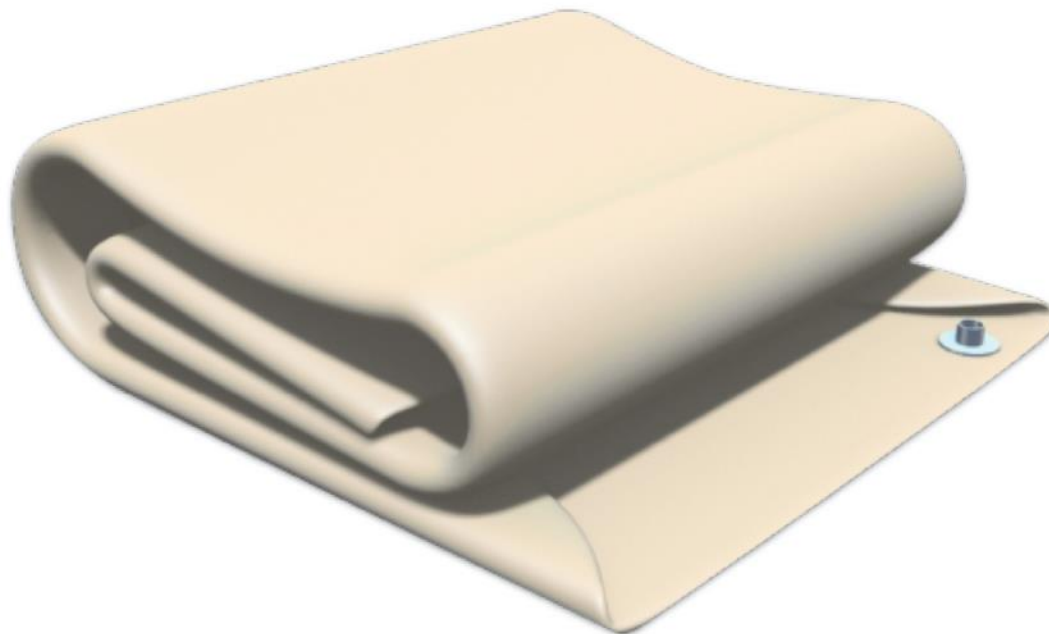

Outer Cover		
Fabric	Average Weight	240 g/m ²
	Coating	25 g/m ²
	Colour	White
	Tensile Strength Warp	Dan/ 5 cm 300 Kg
	Tensile Strength Weft	Dan / 5 cm 280 Kg
	Elongation	13.60 %
Valve	Type	3" Male Cam-Lock
	Raw material	Polypropylene + Stainless Steel
Valve Cover Plug	Type	3" screw in
	Raw material	Polypropylene
Lashing Belts		
Webbing	Raw Material	Polypropylene Multifilament
	Average Weight	60 g/lnm
	Width	55 mm
	Tensile Strength Warp	2000 Kg
	Elongation	18 %
Inner Liner		
PE Film	Thickness	125 mic
	Total Layers	2
Mechanical Performance	Dart Drop	600 g (body)
		300 g (fold)
	Tensile Strength	30 Mpa (MD)
		35 Mpa (TD)
	Elongation	550% (MD)
		900% (TD)
	Yield	7 Mpa (MD)
		8 Mpa (TD)
Tear Resistance	10 g/μm (MD)	
	22 g/μm (TD)	
Food Approval Legislations		
	FDA	21 CFR 177.1520 Polyolefin's
	EU	Directive 90/128/EEC